







In LOCK

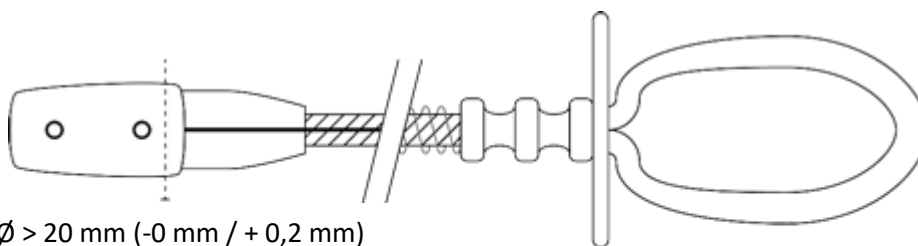

$\varnothing > 20 \text{ mm} (-0 \text{ mm} / + 0,2 \text{ mm})$

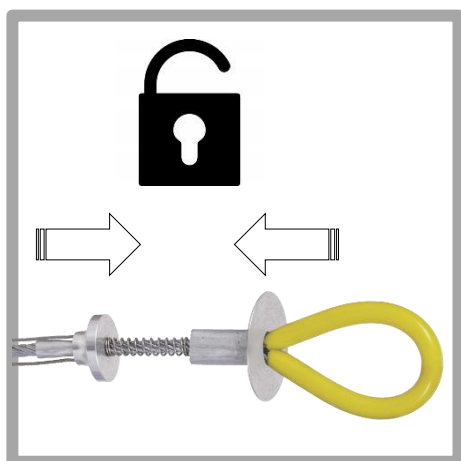

HS CODE
73160010
CARTON SIZE / PCS.
60 x 40 x 24 cm / 30
AET CE N°16-0103
DOLOMITICERT N°2008 Zona Industriale Villanova 32013 Longarona(BL) Italy
MODULE D FI14/14003.02
SGS Fimko Oy, N°0598 Takomotie 8, 00380 HELSINKI, Finland


REF.	FA 60 018 00
CE	EN 795:2012 Type B
	x1
MAT.	
DIM.	110 mm
R (kN) / MBS (kN)	12 kN / 15 kN
	Ø 18 mm – 19 mm x 110 mm
	0.15 KG



Nombre d'utilisateurs
 Number of users
Cantidad de usuarios
 Cantidad de usuarios
 Quantità di utilizzatori
 Anzahl der Benutzer

R (kN) / MBS (kN)

Résistance statique (en kN) / Résistance à la rupture
 Static strength / Minimum Breaking Strength
Resistencia estática (en kN) / Resistencia a la ruptura (en kN)
 Resistencia estática (in kN) / Resistencia a la ruptura (in kN)
Statische Festigkeit (in kN) / Bruchfestigkeit (in kN)



Fixations à utiliser / Dimensions de la structure d'accueil
 Fasteners to use / Dimension of the receiving structure
Fijaciones que deben usarse / Dimensiones de la estructura receptora
 Elementi di fissaggio da utilizzare / Dimensioni della struttura ospitante
Zu verwendende Befestigungen / Abmessungen der Aufnahmestruktur