


Workshop gantry VGI

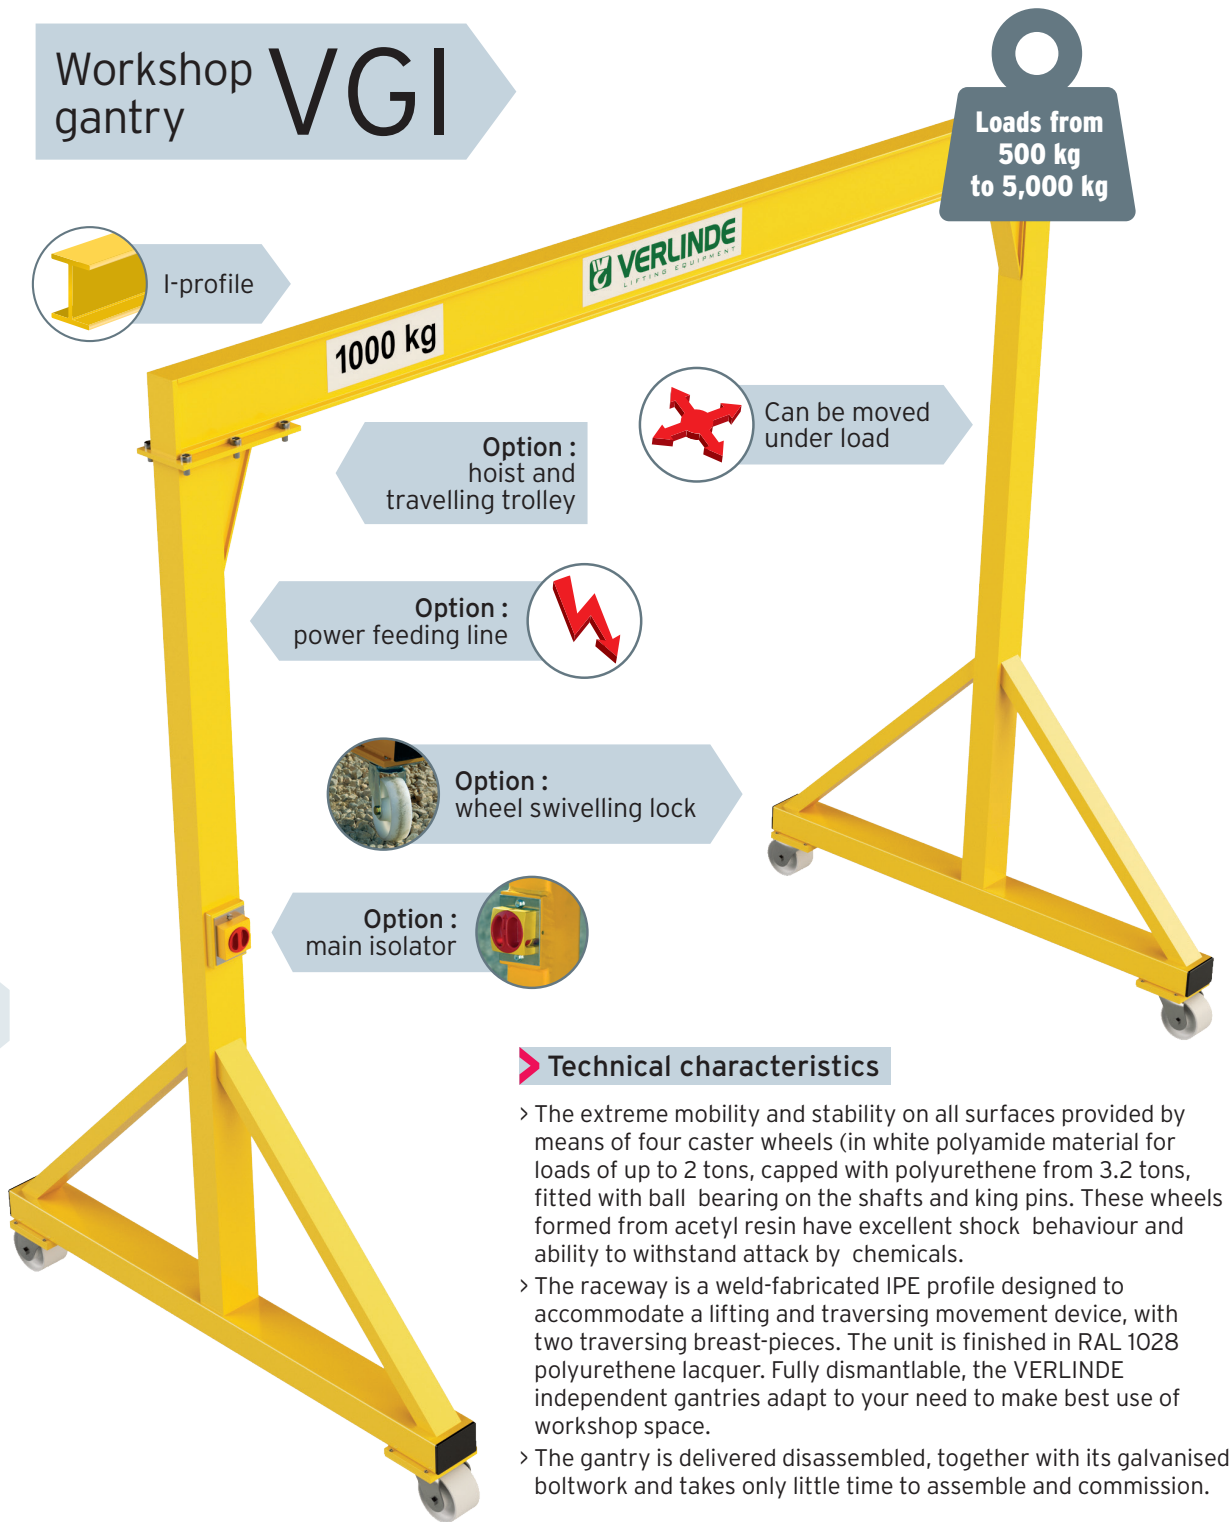

► Technical characteristics


- > The extreme mobility and stability on all surfaces provided by means of four caster wheels (in white polyamide material for loads of up to 2 tons, capped with polyurethane from 3.2 tons, fitted with ball bearing on the shafts and king pins. These wheels formed from acetyl resin have excellent shock behaviour and ability to withstand attack by chemicals.
- > The raceway is a weld-fabricated IPE profile designed to accommodate a lifting and traversing movement device, with two traversing breast-pieces. The unit is finished in RAL 1028 polyurethane lacquer. Fully dismantlable, the VERLINDE independent gantries adapt to your need to make best use of workshop space.
- > The gantry is delivered disassembled, together with its galvanised boltwork and takes only little time to assemble and commission.

► Options

- > Main isolator.
- > Power feeding line.
- > Reel.
- > Polyurethan wheel (per wheel).
- > Rigging ring.
- > Wheel block (per wheel).
- > Polyurethan 4 layer painting RAL 1028 on epoxy primer.

- > Polyurethan 4 layer painting sepcial RAL on epoxy primer.
- > Indoor paint other color than RAL 1028.
- > Hot dip galvanizing.
- > Covering for hoist.
- > Cover for main isolator.

► Load capacity



> Gantry VGI